



ATAC LED Work Lights - **SENTINEL** 500, 1000, 1800




93742 - Sentinel 500

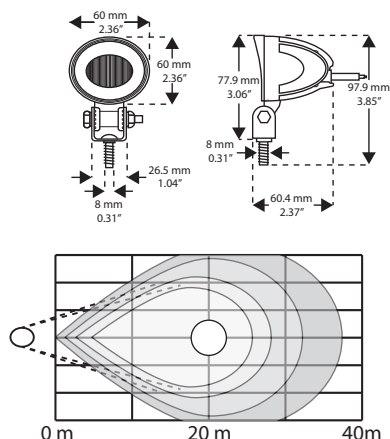

93741 - Sentinel 1000

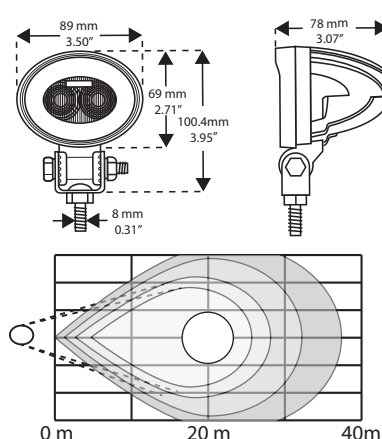

93740 - Sentinel 1800

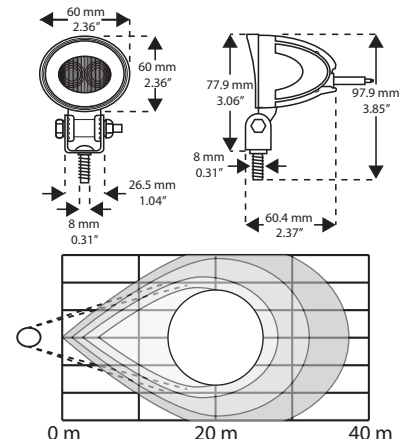

Features

- 2 Power LED's for Sentinel 500 & 1000, 1 Power LED for Sentinel 1800
- Operating temperatures between: -30° - +50° C
- Extremely durable polycarbonate lens
- Compact profile waterproof housing
- Die cast aluminum housing
- Latest generation LED's
- ADR-approved, IP6K9K
- German engineered
- 3 Year Warranty



Specifications

Voltage Range / Current Draw	12-36 VDC / 0.5 - 1.0 A
Dimensions (mm) (93740 / 93741 / 93742)	60 x 60 x 60.4 / 89 x 69 x 78 / 60 x 60 x 60.4
Weight	0.2 kg
Lumens	500 lm / 1000 lm / 1800 lm
Approvals & Certifications	IP6K9K



Tous Terrain Tious Climats Lumière de Travail à DEL - **SENTINEL**





93742 - Sentinel 500

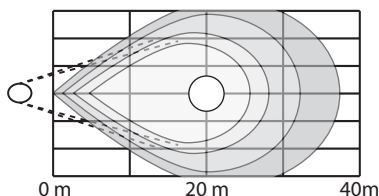

93741 - Sentinel 1000

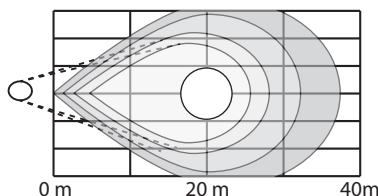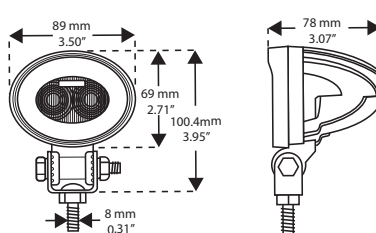

93740 - Sentinel 1800

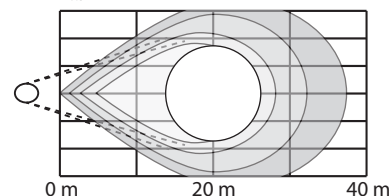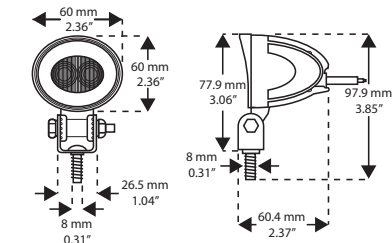

Fonctionnalité

- Lampes de Travail à 2 puissance DEL pour Sentinel 500 & 1000, 1 puissance DEL pour Sentinel 1800
- Températures d'opération est entre: -30° - +50° C
- Lentille avec extrême durabilité en polycarbonate
- Profile compact avec boîtier résistant à l'eau
- Boîtier en aluminium moulé sous pression
- DEL en Dernier Génération
- ADR-approuver, IP6K9K
- Ingénierie Allemand
- Garantie pour Trois Ans

Spécifications

Range de Voltage / Courant Absorbé	12-36 VDC / 0,5 - 1,0 A
Dimension en mm (93740 / 93741 / 93742)	60 x 60 x 60,4 / 89 x 69 x 78 / 60 x 60 x 60,4
Masse	0,2 kg
Lumens	500 lm / 1000 lm / 1800 lm
Certifications et Approbations	IP6K9K